

UNIVERSITY - NATIONAL OCEANOGRAPHIC LABORATORY SYSTEM

BASIC MINIMUM SCIENTIFIC SUPPORT CAPABILITIES FOR UNOLS VESSELS: SUPPLY, OPERATION AND MAINTENANCE

Report of Workshop at
Texas A&M University February 26-28, 1979
Sponsored By UNOLS

Contents

I. Deck Operations.	1
II. Instrumentation.	25
III. Navigation and Communications.	34
IV. Ship Laboratory Space and Facilities	44
V. Appendix - Workshop Participants	48
VI. Tables Indicating Cost of Meeting Workshop Recommendations By Vessel (To Be Inserted)	

July



Office Memorandum

WOODS HOLE OCEANOGRAPHIC INSTITUTION

TO : Fred Sayles

DATE: 27 March 1979

FROM : Don Moller 

SUBJECT: Comments on Workshop Report

Since you have been given the dubious honor of criticizing the wire rope section of the UNOLS Workshop Report, I will dump my comments on you.

I feel the workshop dropped the ball by not determining the basic requirements for wire rope and winch systems. What is needed is a set of operating requirements from the scientific users of these systems, stating their anticipated needs for the next 10 years in terms of:

- a.) Instrument weight
- b.) Instrument bulk or size
- c.) Payout and rehaul speeds
- d.) Operating depths
- e.) Data transmission (conductors)
- f.) Anticipated annual use
- g.) Likely areas of operation and sea states

Using these values, which should be considered as scientific demands, the present systems can be evaluated for ability to perform. Based on this evaluation necessary improvements or upgrading can be determined, outlined and proposed.

I will take the items as summarized in the report, one by one, and comment on them. There is no fault to be found in the essence of the recommendations if one takes the idealistic approach. I question the practical implementations and effectiveness of some of the suggestions.

- 1.) WIRE WINDING AND TENSIONING MACHINES - A great idea and a virtual necessity if the wires can not be streamed at sea before their first use. One should be available on the East Coast and one on the West Coast for general use. No one operator should have his own. I doubt the existance of any one machine capable of putting a load of up to 10,000# on $\frac{1}{2}$ " or $\frac{5}{8}$ " wire and capable of handling $\frac{3}{16}$ " to $\frac{3}{4}$ " wire, but this may not be a problem. Sending a machine to sea is attractive but cruises where it would be used will be of extended duration and with multiple disciplines on board. Can you afford the storage space for it and the spare reels of wire on cruises

Subject: Comments on Workshop Report

where space is at a premium already? I doubt its practicality. I think it will be more efficient to have a simple wire winding device aboard to change wires and then stream the wire before use. Sending a tensioning machine to sea will take it out of circulation for long and unacceptable periods of time.

- 2.) TENSION LIMITING DEVICES - Nice but difficult to assure correct use. Set a limit on tension and the only way of reacting to overloads is to payout more wire faster. Also, if a scientist has the success of an experiment or a cruise hanging on the end of an overloaded (in terms of tension limit) wire you know damn well that the limits will be overrode to get the instrument back, thereby negating the purpose of the device. It is much better to use foresight and planning to prevent the problem from occurring.
- 3.) ACCUMULATORS - I agree with their usefulness in reducing the dynamic effects of starting and stopping the winch and for reducing or otherwise smoothing out acceleration due to ship motion. A properly designed and installed accumulator may be able to reduce the vertical excursions of the wire on a moving platform. Multicave accumulation will reduce the useful life of wire by introducing more bending stress points.
- 4.) LEVEL WINDING - Agree in principal with statements. Perfect levelwinding at all times depends on a match of wire size, drum flange width and throw of diamond thread, as well as proper tensioning. Assure this match for each size wire on each winch and there will be good level winding. Tolerances are very small so components must be well designed, manufactured, installed, maintained AND replaced when worn.
- 5.) MAINTENANCE SCHEDULES - A guideline, made available to the fleet, for the care and feeding of wire and winches would be useful. What would be the consequences of not following the guidelines? Off with their funding!! Proper maintenance is an absolute necessity on every winch. The question is: What is proper?
- 6.) RANGE OF WIRE SIZES - I disagree with the concept of making each winch capable of accommodating more than one size wire. It will be necessary to maintain multiple drums and timing gears for level-winding for each winch in order to assure the matches mentioned in Section 4. It is better to set a standard size based on needs for trawl, hydro and conducting wires. All requirements for sizes other than the standard should be handled as special cases and the individual project should provide either a special winch or provide the components for modifying the winches. As fleetwide needs change, the winches should be upgraded to a new wire size.

Subject: Comments on Workshop Report

The above refers to existing winches. I have no doubt that a new winch system could be designed which permits multiple wire sizes to be accommodated. I would suggest that it may be time to consider a new generation of oceanographic winches capable of meeting our expanding needs.

- 7.) WINCH/WIRE MONITORS - I agree with the recommendations. I would encourage the use of tension recorders for all winches. They would be used to monitor the stressing of the wire for determining its life history and assist in decision making for wire replacement.
- 8.) SPARE WIRES - Spare reels of wire should be carried on all vessels capable of carrying them. Science programs depend too much on the integrity of the wires to neglect having spares on board.
- 9.) SLIP RING DEVICES - I agree with concept.
- 10.) LUBRICATION - Wires must be lubricated and light oils should be used. The question remains on how often wires must be lubricated.
- 11.) DOCUMENTATION - A necessity fully implemented at WHOI and being drummed into the Captains and Bosn's.
- 12.) LOADING CALCULATIONS - The determination of the effects of ship motion on the wire for a given sea state is an important factor in protecting the wire from damage, not to mention loss of equipment. The significance of the velocities and accelerations associated with ship motion, although recognized, is not fully appreciated as a major contributor to wire abuse. Operating limits for a given wire, ship, sea state, instrument and operating depth must (and on WHOI ships will be) be imposed. I agree with the recommendations of the report. I feel a computer program is unwieldy and is overkill for all but special applications. A tabular or graphic form of sea state operating limits, easily referenced and convenient to use, should be made available for each ship.
- 13.) VARIETY OF WIRE ROPE SIZES - The recommendation to restrict the fleet to specific size wires is beneficial only if it means manufacturers can make larger runs of the wires peculiar to oceanographers and stockpile them, thereby reducing long delivery time. Also, it aids in standardizing end fittings, clamps and messengers throughout the fleet. Otherwise, institutions should be compelled to provide wires of recommended strength, length, number of conductors, power and resistance ratings. Let the various

Subject: Comments on Workshop Report

institutions have the freedom of choice of wire. Standardization and uniformity tends to preclude innovativeness and improvement which in the case of wire rope there is plenty of room for.

- 14.) BLOCKS AND SHEAVES - I agree that blocks and sheaves must be of the correct size for each size wire. The use of improper sizes is stupid and damn near criminal. But this doesn't mean that UNOLS can police their use. Let UNOLS simply provide the guidelines by publishing recommended sheave sizes for oceanographic cables. The statement, "sheaves 40 times the diameter of the smallest wire," is wrong. It should read, "40 times the overall wire diameter" or "400 times the individual wire size."
- 15.) STUDY OF E-M CABLES - Such a study is warranted. I think we can push the state of the art to the limit and should take advantage of any new development. The areas in need of improvement are: Weight vs. strength, torque balancing, crush resistance and electrical properties of conductors. Walden is conducting such a study now.
- 16.) RECOMMENDATIONS FOR E-M CABLE - I agree with the recommendations. I would add that a replacement schedule for each wire in use be established based on its actual use, its exposure to the elements and maintenance. Don't wait to replace them until they look bad. I believe the rate of deterioration of wires is very low for the first year of use and then accelerates very rapidly. Proper lubrication will undoubtedly reduce this rate of deterioration but a bright, shiny wire will weaken with use just as a rusty one. Oceanographic cables are the most critical element in the oceanographer's catalog of tools, second only to the ship itself. The only sure way to protect his instruments is to replace all wire on a regular and orderly basis.

*Alarm systems are overkill.
counterbalanced blocks.*

LAB FACILITIES

- a) ELECTRICAL wire listed kW sufficient
- b) X RAYS - air locker and at least 2 science wells.
- c) AIR COND - all lab space A/C
- d) WET LAB - not a van - space can be used otherwise
- e) UNCONTAM - SW - what pipe
FW - OK
- f) g) GAS BOTTLES - nothing special - general provision taps can
- g) h) ACID STOV - not special on boat. (not permanent)
- h) i) TIG DOWN - great.
- i) j) FRIDGE - definitely not permanent.
- j) k) BOO'S STORES - should provide most of Sci. needs.
- l) MANS - OK but play down
- m) SQUAM BOX - excellent.
- n) SAFETY GEAR - override breathing in narrow work
survival suit excellent.
- o) SHELVES & DRAWERS - as appropriate

COMMENTS

NAV. & COMM.

1) Recommendation -

a) SAT NAV on larger vessels only.

b) DIGITAL OUTPUT on all is good idea particularly with GPS system.

c) SPEED - present log systems are not reliable and tend not to work ^{well} on small ships such as RVS

d) MANUAL DATA INPUT - tends to be arbitrary and ill-used.

e) MET. DATA - who would use it! Perhaps capable available for special cruises

f) TOO MUCH DATA - what the hell do you do with it all.

g) GPS - agree with recommendation.

h) COAST C - particularly on small vessels - return LAT/LONG OUTPUT and remote display at helms are very practical.

i) COMMUNICATIONS - VHF - by law
SSB - excellent.
SATCOM - do we really need it. Perhaps for special projects and long cruises only.

ATS ?

j) SENSORS AND LOGS - not permanent on all!

k) CABLE RINGS - OK

INVITEES

A-M

Mr. Arnold Bainbridge
Scripps Institution of Ocean.
Sorrento Valley, S-001
La Jolla, CA 92093

Dr. George Keller
School of Oceanography
Oregon State University
Corvallis, OR 97331

Mr. Keith Kaulum
CNR Detachment
Code 480T
NSTL Station
Bay St. Louis, MS 39529

Dr. Richard T. Barber
Duke University Marine Lab.
Beaufort, NC 28516

Dr. Peter Lonsdale
Scripps Institution of Ocean.
Sverdrup Hall, A-005
La Jolla, CA 92093

Mr. Charles Hotes
Western Gear Corporation
2100 Norton Avenue
Everett, WA 98201

Mr. Richard Dinmock
Iselin Bldg.
W.H.O.I.
Woods Hole, MA 02543

Mr. Alan Driscoll
Graduate School of Oceanography
University of Rhode Island
Narragansett, RI 02881

Dr. Kevin Legman
U. of Miami, RSMAS
4600 Rickenbacker Causeway
Miami, FL 33149

Captain R. Dinsmore
208A Clark
W.H.O.I.
Woods Hole, MA 02543

Mr. Al Berian
Rochester Corporation
P.O. Box 312
Culpeper, VA 22701

Mr. Emile Grignard
Grignard Chemical Company, Inc.
185 Foundry Street
Newark, NJ 07105

Mr. Robert B. Elder
NSF/OFS
1800 G Street, NW
Washington, DC 20550

Mr. A. Lucht
U.S. Steel
P.O. Box 1709
New Haven, CT 06507

Dr. Christopher N.K. Mooers
College of Marine Studies
University of Delaware
Lewes, DE 19958

Mr. Robert D. Gerard
Lamont-Doherty Geo. Obs.
Columbia University
Palisades, NY 10027

Dr. Richard C. Dugdale
Bigelow Laboratory for Oc. Sci.
McKown Point
West Boothbay Harbor, ME 04575

Dr. P. Biscaye
Lamont-Doherty Geo. Obs.
Columbia University
Palisades, NY 10027

Mr. Thomas Forhan
NSF/OFS
1800 G Street, NW
Washington, DC 20550

Mr. Roderick Mesecar
School of Oceanography
Oregon State University
Corvallis, OR 97331

Mr. H. Lawrence Clark
UNOLS Office
W.H.O.I.
Woods Hole, MA 02543

Miss Mary K. Johrde
NSF/OFS
1800 G Street, NW
Washington, DC 20550

Mr. Dean Letzring
Texas A&M University
Marine Operations Facility
P.O. Box 3236
Galveston, TX 77550

Dr. Gary V. Latham
U. of Tx. Geophysics Lab.
Marine Science Inst.
700 The Strand
Galveston, TX 77550

Mr. James J. Gibbons
Rosentiel School of Marine &
Atmospheric Sciences
4600 Rickenbacker Causeway
Miami, FL 33149

Mr. William C. Markey
Markey Machinery Co., Inc.
79 South Horton Street
P.O. Box 24788
Seattle, WA 98124

Rosentiel School of Marine &
Atmospheric Sciences
4600 Rickenbacker Causeway
Miami, FL 33149

Dr. H.T. Rossby
University of Rhode Island
Graduate School of Ocean.
Narragansett, RI 02882

Dr. R. Schwartzlose
Scripps Inst. of Oceanography
Ritter Hall, A-027
La Jolla, CA 92093

Mr. Kenneth Peal
Swift House
W.H.O.I.
Woods Hole, MA 02543

Captain T.K. Treadwell
Department of Oceanography
Texas A&M University
College Station, TX 77843

Dr. Thomas E. Pyle
Office of Naval Research
800 N. Quincy Street
Arlington, VA 22217

Dr. J.A. Musick
Virginia Institute of Mar. Sci.
Goucester Point, VA 23062

Mr. Constantine Tollios
103B Bigelow
W.H.O.I.
Woods Hole, MA 02543

Dr. Orrin H. Pilkey
Duke University Marine Lab.
Beaufort, NC 28516

Dr. W. Nowlin
Texas A&M University
Dept. of Oceanography
College Station, TX 77843

Miss Sandra Toyne
NSF/OFS
1800 G Street, NW
Washington, DC 20550

Mr. R.C. Swenson, Code 350
Naval Oceanographic Laboratory
800 N. Quincy Street
Arlington, VA 22217

Capt. John Boyce Watkins, Jr.
Dept. of Oceanography
University of Washington
Seattle, WA 98195

Dr. Derek W. Spencer
203A Clark
W.H.O.I.
Woods Hole, MA 02543

Mr. Charles C. Windisch
Lamont-Doherty Geological Obs.
Columbia University
Palisades, NY 10964

Dr. Jean K. Whelan
459 Clark
W.H.O.I.
Woods Hole, MA 02543

Mr. Robert G. Walden
305 Smith
W.H.O.I.
Woods Hole, MA 02543

Mr. Douglas C. Webb
201F Smith
W.H.O.I.
Woods Hole, MA 02543

Mr. Thomas Stetson
UNOLS Office
W.H.O.I.
Woods Hole, MA 02543

Dr. Peter H. Wiebe
2-20 Redfield
W.H.O.I.
Woods Hole, MA 02543

Dr. David R. Schink
Department of Oceanography
Texas A&M University
College Station, TX 77843

Mr. Shale Niskin
General Oceanics, Inc.
5535 N.W. 7th Avenue
Miami, FL 33127

Mr. W.S. Wilson
Code 410 (481)
NORDA
NSTL Station
Bay St. Louis, MS 39529

Dr. Thomas C. Royer
Institute of Marine Science
University of Alaska
Fairbanks, AK 99701

Mr. Lonnie Thompson
Lebus International Inc.
Longview Industrial Park
P.O. Box 2352
Longview, TX 75601

Mr. Dan Toporoski, Code: P-005
Nimitz Marine Facility
Scripps Inst. of Ocean.
LaJolla, CA 92093

Dr. E.A. Silva, Code 485
Office of Naval Research
800 N. Quincy Street
Arlington, VA 22217

Mr. James Snodgrass
Ocean Data Systems, Inc.
3581 Kenyon Street
San Diego, CA 92110

BASIC MINIMUM SCIENTIFIC SUPPORT CAPABILITIES
FOR UNOLS VESSELS: SUPPLY, OPERATION AND MAINTENANCE

Report of Workshop at
Texas A&M University February 26-28, 1979
Sponsored By UNOLS

Contents

I. Deck Operations.	1
II. Instrumentation.	25
III. Navigation and Communications.	34
IV. Ship Laboratory Space and Facilities	44
V. Appendix - Workshop Participants	48
VI. Tables Indicating Cost of Meeting Workshop Recommendations By Vessel (To Be Inserted)	

INTRODUCTION

This report is the result of a study that includes a workshop held at Texas A&M University on February 26-28 and a detailed review of the preliminary report of the workshop by each UNOLS' institution and by interested individuals in the oceanographic community. The comments of the institutions and individuals were considered and the present edited report was written on June 7 and 8, 1979 at Woods Hole Oceanographic Institution.

This study was initiated because of a growing concern in the oceanographic research community about general inadequacies in the area of shipboard instrumentation and oceanographic equipment. Complaints range from insufficient funds in the program to the inaccessibility and poor condition of existing equipment. Further problems of a different nature have been identified, such as the widely differing capabilities of research vessels even within the same size class, especially with regard to winches, cranes and wire. The procurement, inventory, maintenance, and management procedures vary widely at research institutions represented by UNOLS.

Accordingly, the UNOLS' Advisory Council undertook to study these equipment-related problems. A workshop was sponsored by UNOLS with the cooperation of the Ocean Science Board (OSB) and Research Vessel Operators Council (RVOC). Co-chairmen of the workshop were: Dr. Richard T. Barber, (UNOLS); Dr. Derek W. Spencer, (OSB); and Mr. Robert. D. Gerard, (RVOC). Dr. George H. Keller, Chairman of the

DECK OPERATIONS

Recommendations

- OK 1. Wire winding machines should be used by all vessel operators.
- OK 2. Accumulators appropriate for the winch and wire system should be installed.
- * 3. Current winch level winding systems should be upgraded to ensure proper winding of wire ropes and cables.
- * 4. Fleet-wide maintenance schedules should be established to ensure proper care and reliability of winches, cranes and other scientific deck machinery.
- winny reason 5. Winch/wire monitors are required to permit documentation of wire rope and cable use and history and to assess new methods of extending wire life. This documentation should be readily available to all scientist users.
- * 6. Interchangeable winch drums are recommended to avoid wire winding exchanges at sea and expand capabilities of vessels.
- * 7. A low viscosity lubricant should be used on all deep sea wires. The exception to this would be special purpose applications, e.g. organic chemical sampling.
- * 8. Calculations for each vessel that will predict wire loading vs. sea state should be available in convenient graphic or tabular form.

hydro winch size is recognized. This winch should have the capability of handling 10,000 meters of 5/16" diameter E-M cable. A limited number of these winches should be made available to the oceanographic fleet for special projects.

Along with such changes it may be necessary to adjust the maximum hauling power of the winch such that the maximum load it could pull will be safely below the field value for each wire used. Flexibility in the winch system will permit the vessel to be more responsive to specific user needs, and will provide the vessel operator more latitude in the acquisition of wire (which may be in short supply). We also recommend that the blue water vessels have a trawl winch capacity of at least 12,000 m of wire and a hydro winch capacity of 10,000 m of wire. Existing winches should be modified to include the above capabilities.

Successful scientific operations at sea are largely the result of a combination of proper winch operation and maintenance procedures.

Wire Winding Machine

It is recommended that each shore outfitting facility have access to a portable machine to wind wire from ship's winches and/or storage reels onto winch drums. A plan for regional sharing of a limited number of machines should be developed. For example, the needs of the oceanographic community (within the contiguous 48 states) might be met by assigning one machine each to the northeast, southeast, gulf, southwest and northwest regions.


303
10K
good idea

question
effectively
of value

do we
need all
this

TOO MANY!!

stress of wire rope/cables; preliminary results indicate that normal heave and roll can impose forces on a CTD cable equivalent to +0.5G.

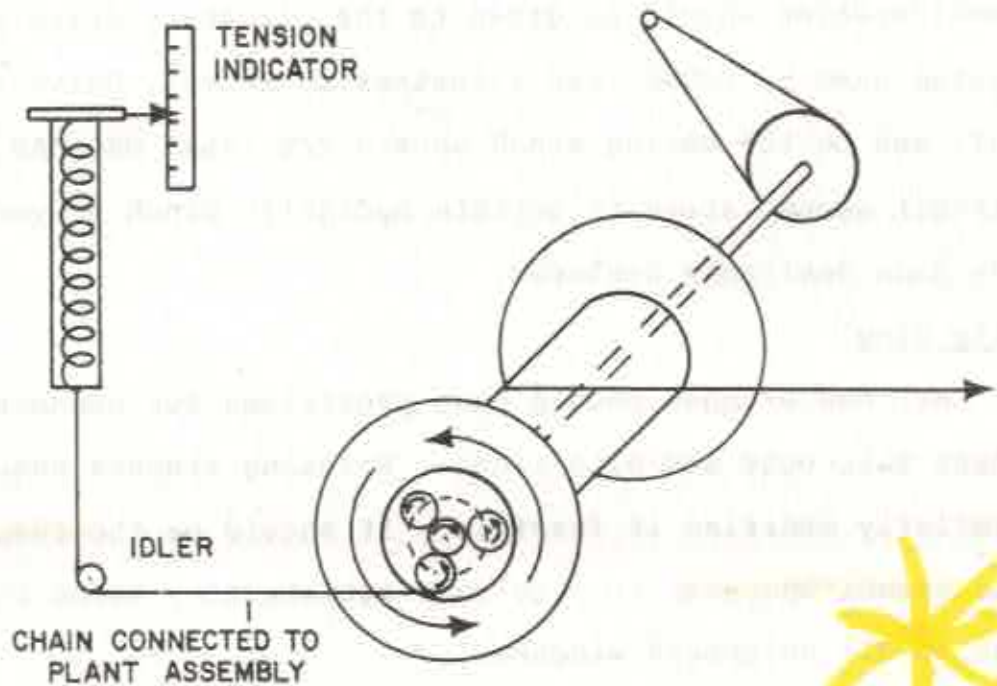

Sketch of L-DGO Planetary Drive - Accumulatory System

Frequent causes of failure of both mechanical and electro-mechanical cables have been attributed to the impact forces produced, particularly after the release of tension on a downroll followed by snap-loading. An accumulator can absorb these loads by responding to the change in tension in the wire with the vessel motion. The unit can be designed to absorb the resulting forces by specifying the total wire accumulation length required and the maximum tension.

using changeable gears or sprockets to obtain correct ratios. They should also be designed to provide the correct carriage travel and the proper dwell time for the rope at each end of the drum during spooling. Size of shaft and thread will depend upon width of drum and distance to first fairlead or sheave to determine side loads. Variable ratio drivers are not recommended due to slippage and difficulty of obtaining the exact ratios required for spooling.

Level winds and existing equipment can in many instances be modified or updated to improve the spooling of wire ropes. Such modifications should be supported as a means of extending the operating life of costly wire ropes and cables.

B. Hydro Winches

Power-driven level winds are also recommended for hydro winches. As electrical conductor cables are normally round and uniform in size, good spooling can be expected and should be obtained. Level winds should be designed to accommodate cable sizes of 3/16" and 7/32" by using quick-change sprockets or gears. The greatest advantage to be gained from improved level winding applies to E-M cable for the following reasons:

1. E-M cables have a considerably shorter useful life than comparable wire ropes under existing conditions.
2. The most common cause reported for retiring E-M cables

direction and physical operation of the winch in situations where the winch is located away from direct observation.

It is further recommended that a procedure be implemented to test and calibrate these monitors at regular intervals.

Interchangeable Winch Drums

The use of winch drums which can be readily exchanged at sea or foreign port is recommended. In this way a failed wire rope or cable can be quickly replaced with minimum loss of costly ship's time. Similarly a single winch could serve different programs requiring different wire rope or cable sizes or types. An additional advantage is that when purchasing a new wire rope or cable an empty drum can be sent to a manufacturer to have the wire wound on at a specified tension so that it is ready to use immediately when installed.

Blocks and Sheaves

We strongly endorse the requirement that the blocks and sheaves used by UNOLS' vessels be matched to the specific wire size in use aboard the vessel.

To avoid the unnecessary damage currently being done to wire ropes due to inadequate sheave diameter and groove diameter it is essential that we begin matching the handling equipment to the wires in use. The formulas and rules necessary to determine proper sizes and ratios are in all standard references. It is incumbent upon UNOLS to develop the necessary procedures to ensure that the rules are followed in all cases.

Future Winch Concerns

The U. S. does not have at present a vessel capable of deploying large double-warp trawls in the deep sea. In 1975 the need for such a trawling capability on a UNOLS' vessel was clearly identified by a group of nekton specialists brought together by NSF and ONR to make recommendations about problems of assessing nekton populations. The results of that workshop* clearly outline vessel and winch criteria necessary for large double-warp deep sea trawling. These criteria may be met by new vessel construction, modification of an existing vessel, or cooperative arrangement with other countries (which already have double-warp deep sea trawling capabilities).

*See Report "Workshop On Problems of Assessing Populations of Nekton", 25-27 February, 1975, Santa Barbara, CA, 30 pp. W. G. Pearcy, Editor.

Recommendations for more closely standardizing wire ropes and electro-mechanical cables among UNOLS' vessels are as follows (inches):

Trawl wire - 1/2, 5/8

Hydro wire - 3/16, 7/32 ^{1/4}

E-M cable - 7/32 ^{.303}

It should be noted that the above recommendations represent the minimum number of sizes believed necessary to conduct standard operations. Non-standard operations requiring special wire/cable sizes are also recognized: For example, the 5/16" diameter E-M cable for GEOSECS-type CTD Operations. *probably too small*

Other data show that E-M cable is retired mainly due to conductor loss (50 to 100% of retirements at 4 out of 6 institutions).

Regarding the use of lubrication/preservative, about 70% of the institutions employ some type of oil but the effect on wire life is unclear due to poor documentation of wire use and reasons for retirement.


Torque Balance

Need: Torque balance of a tension member, either electro-mechanical or strictly mechanical (wire rope) is considered synonymous with the tendency to rotate as tension is increased. As the tension member rotates torsional energy is stored and the rate of dissipation of this torsional energy must be controlled to prevent damage to the tension member. Rapid dissipation such as

Specialized double layer armor: This construction embodies a number of small diameter wires in the outer armor as follows:




TORQUE BALANCED
DOUBLE ARMOR




CONVENTIONAL
DOUBLE ARMOR

The ratio of lay lengths of the outer-to-inner armor layers (lay ratio) is also increased to balance the torque of the two layers. The small diameter wires in the outer armor are less geometrically stable than those of a conventional double armor and are more subject to physical damage from snagging, crushing, etc. Further, this construction has a low flexure fatigue life.



ALL OUTER ARMOR
WIRES JACKETED



ALTERNATE OUTER ARMOR
WIRES JACKETED


Long Term Considerations:

Wire rope: To improve the corrosion resistance and spooling characteristics (roundness) some wire rope may be jacketed.

Electro-mechanical cable: Two developments are finding increased use.

Kevlar: The use of the high strength Aramid fibers is increasing and initial problems with self-abrasion are being alleviated somewhat. These cables are usually made to order and the cost is higher than for a steel strength member cable of the same strength.

Double-Caged Armor: This construction involves essentially a conventional double layer armor cable wherein every other wire is omitted in both armor layers. The spaces are then filled with the jacketing material. The crosssection therefore appears as illustrated below.



Manufacturing techniques are being developed by several manufacturers so that the present higher cost is expected to decrease.

A principle failure mode of E-M cable is related to torque and thus kinking during load relaxation. Therefore, operating procedures should be followed which maintain tension all the time. These procedures should be based on predictive analysis applicable to the ship, winch wire system, and lowered device. Fairleads and head blocks should be arranged to follow the lead angle of the cable to minimized torque induced by the cable riding up the side of sheave.

The use of counter-balanced blocks should be carefully considered together with keepers to ensure that cables remain in sheaves' grooves should they become slack.

Manufacturers' recommendations should be followed in selecting minimum sheave diameter and sheave groove size.

Institutional cable retirement criteria are poorly defined at present. Visual observations along with performance and damage record are still the only guide available.

Wire rope fails from various factors such as bending fatigue, axial loading fatigue, corrosion fatigue, wear, and above all, mechanical damage.

The strength of the wire rope when new should be known and a certified test report of breaking strength from the manufacturer should be ordered when the rope is purchased.

Tests should be made in a dynamic test machine having both ends fixed and also with one end fixed and the other free to rotate.

After the rope has been put to use it should be inspected visually as it is reeled in. A written record of broken wires by location in the reel should be maintained.

contaminate scientific samples a leader of inert material should be used. In other cases the use of a complete reel of stainless steel wire rope is the best solution. Lubricant can be applied in a variety of ways on shipboard: spraying, brushing, and dripping procedures have been followed by various operators. The same lubricant-preservative which is applied at sea should also be specified for application during manufacture of wire rope or cable to ensure chemical compatibility as well as corrosion protection during the period of storage prior to use.

Predictive Models

Insufficient consideration of the dynamic motions of the headblock for instrument lowering systems has led to catastrophic wire failures. Normally the headblock is placed well outboard and above the center of roll and may be 60 feet or more aft of the center of pitch. The resulting motion from combined heave, pitch and roll may be large. For instance, the peak velocity at the headblock on the R/V KNORR due to a 15° roll in a 7-second sea has been calculated to be 7 ft./sec. or 125 meters/minute. If the package's terminal velocity at the end of the wire is not greater than this it is obvious that slack in the cable above the package will occur. Under such circumstances kinking and snap loading may take place which may severely damage the wire.

Predictive models should be developed and available to the principal investigator to permit him to make on the spot decisions regarding the speed of lowering of his instrument package or even whether it should be deployed at all. Input to such a model would

representatives to make them aware of research needs and to obtain their recommendations regarding the adaptability of their standard products.

On-board cranes should be designed to be used at sea and not only as devices to load cargo and scientific equipment at dockside. This will require engineering development to increase strength and safety factors for the higher angular, non-stable, loading conditions experienced at sea. This is especially true with slewing controls. Overall considerations must include possible effects on a ship's stability over a variety of conditions. Because of the possibility of power failure at sea, emphasis on safety interlocks is necessary. While there is no strong recommendation for crane portability, it is a desirable characteristic in smaller cranes. When portable, they can be placed in various shipboard locations or on other ships within the same institution or elsewhere.

There is a strong potential for more scientific use of cranes at sea as part of a deep sea winch/wire system. With the ability to rotate the crane to follow the wire, the inflexibility of the standard A-frame is eliminated. In some instances this is desirable. Both a crane and A-frame are desirable on UNOLS' vessels. Sole reliance on either system is not recommended. Versatility and ability to adjust to the use of either system might mean the difference between success or failure of a particular operation.

INSTRUMENTATION

Recommendations

1. A person(s) should be designated as Equipment Officer(s) at each institution or for each vessel to oversee maintenance, calibration and management of shipboard scientific equipment.
2. Each ship should have the following:
 - a. Ship parameter network
 - b. Precision echo sounder, 12 kHz
 - c. 3.5 kHz transducer
 - d. Location(s) suitable for placement of science antennas, i.e. radio direction finder, sonobuoy antenna
3. Each institution should identify and advertise the equipment they wish to designate as shared-use equipment.
4. Maintenance, management and calibration of the designated shared-use equipment should be the responsibility of the Equipment Officer and this effort should be an integral part of the ship operating costs.

Instrumentation

The minimum instrument capability that should be on the UNOLS' vessel is described in this section. The equipment and instruments required to provide this capability must be maintained and in some cases calibrated. To ensure that this is done on a routine basis and that these items are available and functional for the scientists as they come aboard a ship, it is recommended that an Equipment

- all should be sampled if water*
- o water depth
 - o wind speed and direction - relative to ship
 - o sea surface temperature
 - o air temperature and wet-bulb temperature
 - o barometric pressure

There are two modes in which all standard parameters should be available: as visual digital information and as electronic digital information. Signals for analog recording should be available for the following parameters: winch activity, wind speed, sea surface temperature.

The input data for some parameters is obtained by simple visual observation with conventional ship facilities, e.g. the bridge watch reads the chronometer and performs sling psychrometer observation for wet and dry-bulb temperature which is then manually inputted to the network. For other parameters the inputs come directly from sensors.

Analog records provide a dimension of history allowing the science party to read the present value of the parameter and to observe trends and changes in the property. The signals for analog recording of the stated parameters should be available in the science laboratory and on the bridge or in the chart room. The signals should be of one type so that a common recorder model can be used.

A system is suggested which allows the input of navigation information into a data logging circuit (Fig. p. 30). The

2. 12 kHz Precision Echo Sounder. The basic bathymetric system aboard a research vessel should include a precision depth recorder and 12 kHz transceiver system. In addition to supplying a record of bathymetry, the system will provide the capability of recording acoustic signals from over-the-side instrumentation (e.g. pingers, acoustic releases, and navigational transponders). It is highly recommended that the recorder and transceiver electronics be **redundant systems** and that the transducer be redundant or replaceable at sea to ensure reliability. A portable echo sounder fish should be available through the shared-use source in those cases where underway echo sounding with built-in transducers is poor.

3. **3.5 kHz Transducers**

4. Suitable location(s) for the placement of science antennas, i.e. radio direction finder, sonobuoy antenna

Shared-Use Equipment

Some equipment is currently in common usage within widely differing disciplines. The complexity of the equipment, its use rate, and its cost do not justify their presence aboard a research vessel at all times. Furthermore, this equipment requires special care, and **it is wiser to remove it from the ship when it is not** being used so that it can be maintained and stored in a controlled environment. We recognize two categories of shared-use equipment.

One class of equipment can be supplied from an equipment pool for use by others at sea assuming they are trained in its use, the other class of equipment must be used as a system that includes an operator and/or maintenance personnel. Obviously, the shared-use of equipment of the latter category presents a more complex management picture since personnel costs have to either be paid by the investigator or charged against a particular research grant as ship time is done now.

The list of shared-use equipment that can be provided without personnel is:

- ✓ 1. Water samplers, including rosette samplers
- ✓ 2. Reversing thermometers
- ✓ 3. Freezer storage, 20 cu. ft.; reefer space, 80 cu. ft.
- ✓ 4. Dredges
- ✓ 5. Simple bottom cameras
- ? / 6. Coring equipment
- ✓ 7. XBT System (launcher, cable, and recorder)
- ✓ 8. Bottom-pinger
- ✓ 9. Copying machine
- ✓ 10. Salinometers
- ✓ 11. Oxygen titration equipment
- ✓ 12. Fluorometers
- ? 13. Spectrophotometers
- ? 14. Scintillation counters
- ? 15. Microscopes
- ✓ 16. Water stills and deionizers

Equipment Officer

In addition to coordinating the shipboard equipment and support logistics, the Equipment Officer has the responsibility to ensure that the equipment is functional and available to the principal investigator. His responsibilities include the following areas:

- a. Cranes and deck handling equipment
- b. Winches
- c. Conductor cable and wire
- d. Laboratory equipment & space
- e. Shipboard electronics for:

Navigation

Echo sounding

Speed log

Time

Wind speed-direction

Remote read-out terminals

Communications

sophistication of many investigations points to an increasing necessity for the frequent, automatic recording of such information. With the advent, in recent years, of microprocessors and inexpensive recording systems the task of realizing such a capability is vastly simplified. Such an automatic logging system becomes even more urgent as we undertake increasingly complex programs in smaller vessels with concomitant limitations in the size of the scientific party.

In the past 10-15 years we have witnessed extraordinary developments in electronic navigation, specifically TRANSIT and LORAN-C. The coming decade will be even more dramatic with the advent of the new Global Positioning System (GPS). When it becomes available, extremely accurate positioning information will be continuously available on a global basis and will open up new research possibilities. In the meantime there will be a transition period, 5-10 years say, before GPS will provide worldwide coverage. Thus there is a strong and continuing need for TRANSIT and LORAN-C. We recommend therefore that UNOLS' vessels be equipped with receivers to exploit the full potential of these systems. As discussed in the Instrumentation Section we recommend the development of electronic interfacing of these receivers to a common ship parameter network. Through this step we believe that navigational data logging requirements of most scientific missions can be achieved in a very cost-effective manner if this interfacing is accomplished.

for these determinations. Some units, such as the NORTHSTAR 6000, use an internal microprocessor; an external computer or microprocessor could be used on others, which determine position for LOP. An interface has been developed within the oceanographic community to serve this purpose. The dual outputs of latitude-longitude and LOP's from the LORAN-C permit investigators to use the LOPs to improve their positioning accuracy, if they desire to do so.

The SATNAV and LORAN-C units complement each other and can serve as backups in some operating areas. The SATNAV positioning is of sufficient accuracy for most oceanographic needs but is limited in its ability to provide information on demand, since it requires a satellite to pass over in order to determine a position. The time intervals between satellite overpasses is variable and ranges from several minutes to several hours. Between these overpasses, the SATNAV system dead reckons from data based on ship's speed and heading. (Ship's speed and heading are also very important for an accurate fix.) SATNAV has the advantage of world-wide coverage. On the other hand, while LORAN-C provides limited global coverage, it provides continuous positioning of sufficient accuracy for common oceanographic needs.

Future Recommendations in Navigation Systems

1. Phasing In the Global Positioning System (GPS)

We envision that the present TRANSIT satellite system will remain in use up to the year 1990. At that time the GPS should be

c. To simplify the complexity of satellite receivers presently being used in an effort to increase reliability.

During the transition from TRANSIT to GPS, the same MX-1112 receiver main frame can be used with internal card replacements to track the GPS satellites. This should substantially reduce the cost of the new GPS receiver to the UNOLS' fleet.

Communications

Objectives

Our objective is firstly to define a minimum set of communications facilities which should be required at present aboard all UNOLS' vessels. In defining these facilities we have taken into account two factors which are of primary importance to our work: 1) scientific use and value of various communication modes; and 2) reliability of emergency communications when questions involving the health and safety of the ship's complement are involved.

Secondly, we make some recommendations for future work which take into account changes we expect to see in the area of shipboard communications within the next decade.

Currently Existing Communication Modes

A brief summary of presently existing modes of communications is given below, together with some advantages and disadvantages of each mode.

3. Very High Frequency (VHF)

Advantage:

- a. Communication is reliable under most propagation conditions.

Disadvantage:

- a. Normal range of effective communication is restricted to 20-30 mi.

4. Satellite communications (SATCOM); ATS I and ATS III

Advantages:

- a. Frequencies are guarded.
- b. A communication net with a central control operator is available.
- c. Communication links do not usually depend strongly on propagation conditions.
- d. Facilities required can be built at relatively low cost.
- e. Use is at no cost.

Statement of Present Minimum Requirements and Short-Term Communications

It is clear that no one mode listed above can be singled out as fulfilling all of our requirements. Therefore, we have established that the minimum set of communications facilities must include HF/SSB, VHF and SATCOM in UNOLS' vessels operating in distant waters. (CW has not been included because this mode is dependent on individual ship-licensing requirements and personnel.)

A basic terminal for voice and ASCII - PCM transmissions costs about \$6000 and consists of the following elements: antenna, rotator, VHF transceiver, PCM decoder, teletype, power amplifier, pre-amplifier, and trackboard.

A short-term recommendation regarding satellite communication is that improvements are needed in the dual yagi shipboard satellite antenna systems that are currently in use.

Future Recommendations

The future status (beyond about 5 years) of the ATS satellites is in doubt. The ATS satellites are well suited to our needs because of the low cost of implementation, the background of work which has already been carried out and the level of technology required to use VHF links effectively, but efforts should be made to explore the feasibility of future satellite communication systems. MARISAT is an example of a system that should be considered although at present this appears to be a costly and less flexible alternative.

In addition, UNOLS should take an active role in discussions with NASA concerning the possible future use (and even deployment) of ATS-type satellites.

should be the responsibility of the individual scientist. All ships should have devices (or separate generators) to prevent major electrical fluctuations when heavy equipment comes on line.

2. Transducers. All vessels without a multiple transducer system should have the capability of replacing transducers without dry docking.

3. Air Conditioned and Heated Laboratory Space. All enclosed laboratory space should be air conditioned and heated. The temperature should be controllable to within $\pm 5^{\circ}\text{C}$, in the range 15° to 25°C , and the systems should be capable of dissipating 15 kw of power. The minimum amount of air conditioned and heated laboratory space should be 300 sq. ft. This minimum may be provided by portable vans.

4. Wet Laboratory Space. Wet laboratory space should be provided by all UNOLS' vessels. This space should be easily accessible to the working deck; it should contain deck drains to handle 20 gallons a minute, a sink and source of hot and cold fresh water and salt water. The wet lab may be a ship's lab or a portable van. The minimum space provided should be 200 sq. ft.

5. Salt Water. Salt water taken into the ship near the bow and pumped to the laboratory and working deck, using PVC pipe, should be provided by all vessels. The minimum rate of supply should be 5 gallons per minute and the pump should be plumbed so that it can be replaced. Placement of the intake and the pump size should be arranged to minimize bubble generation. Through-the-hull access for special clean salt water systems should be provided on all vessels

11. Special Tools. Access to special purpose tools should be provided. Items normally carried in the ship's bosun's locker should be available in small quantities for emergency scientific purposes.

12. Portable Van Support. Where space is available for portable vans, water, drain, power and intercommunication connections should be provided. The power connections should supply both regulated and non-regulated 110v power.

13. Communications, Internal. All work stations including vans should be provided with intercommunication devices.

14. Safety Equipment. The minimum safety equipment to be provided by all UNOLS' vessels should include hard hats, breathing apparatus and working life vests. For operations in cold waters ($<10^{\circ}\text{C}$) survival suits should also be provided.

15. Drawer and Shelf Space. All UNOLS vessels should supply modular drawer, counter and shelf space in the laboratories. This space should be appropriate to the scientific operations.

16. Cableways. Accessible cableways should be provided between all scientific laboratory space, portable van locations, the bridge and locations of sensing instruments.

Oceanographic Equipment Workshop
Participants

Bainbridge, A., SIO	Mesecar, R., OSU
Barber, R. Duke	Mooers, C., U/DE
Berian, A. The Rochester Corporation	Musick, J., VIMS
Cook, E., TAMU	Niskin, S., General Oceanics
Dimmock, R., WHOI	Nowlin, W., TAMU
Driscoll, A., URI	Peal, K., WHOI
Dugdale, R., Bigelow	Pilkey, O., Duke
Elder, R., NSF	Rossby, T., URI
Forhan, T., NSF	Royer, T., U/AK
Gerard, R., L-DGO	Schwartzlose, R., Scripps
Grignard, E. Grignard Chemical Co.	Schink, D., TAMU
Heinrichs, D., NSF	Silva, E., NORDA
Hotes, C., Western Gear	Spencer, D., WHOI
Jennings, F., TAMU	Stetson, T., UNOLS
Johrde, M., NSF	Swenson, R., NORDA
Kaulum, K., NORDA	Takahashi, T., L-DGO
Keller, G., OSU	Thompson, L., Lebus International
LaBrecque, J., L-DGO	Tollios, C., WHOI
Leaman, K., RSMAS	Treadwell, T., TAMU
Lonsdale, P., SIO	Walden, R., WHOI
Lorenzen, C., U/WA	Webb, D., WHOI
Lucht, A., U. S. Steel	Whelan, J., WHOI
Merrell, W., TAMU	Williams, R., U/WA
	Wormuth, J., TAMU

ARNOLD E. BAINBRIDGE

During the morning of February 27, 1979, while attending the UNOLS Workshop on Ship Facilities and Instrumentation, Arnold Bainbridge died. With his passing the oceanographic community has lost a valued colleague whose selfless efforts and leadership have provided many with the means to view the ocean in exciting new ways. His skill and dedication contributed greatly to a legacy of data on the composition of the ocean that is unparalleled in its quality and global extent. Most importantly, he showed that, in the quest for more ocean data, modern technology, applied with insight and care, can enable us to achieve quantity without sacrificing quality.

Arnold Bainbridge was born in Invercargill, New Zealand on December 16, 1930. He was awarded a B.Sc degree in physics from the University of New Zealand in 1951. After working with the Department of Scientific and Industrial Research, New Zealand, he came to the United States in 1960 to join the Department of Chemistry at UCSD. From 1962 to 1966 he worked with the National Center for Atmospheric Research in Boulder, Colorado, and then returned to UCSD, to the Scripps Institution of Oceanography, where he remained until his death. In 1970 Arnold Bainbridge undertook the position as Project Director of the GEOSECS Operations Group and in 1975 his duties in the management of scientific operations at sea were extended when he became head of the Data Collection and Processing Group at SIO.

Arnold Bainbridge leaves a wife, Janet and three teenage daughters, Pamela, Susan and Jennifer.

